

# INTEK™ 17.5 GROSS HP<sup>†</sup>


## 500 CC

Bore 3.56 in. (90.50 mm)  
 Stroke 3.06 in. (77.80 mm)  
 Oil Capacity 48 fl. oz. (1.40 L)



## FEATURES:

- Dura-Bore™ cast iron cylinder sleeve for extended life
- Advanced Debris Management System with our largest dual seal, cartridge-style air filter that provides maximum protection and extends engine life
- Float carburetor for consistent easy starting
- Overhead valve design (OHV) for cooler operation and longer valve life
- Mechanical Governor
- Buyer protection package provides two-year limited consumer engine warranty\*\***

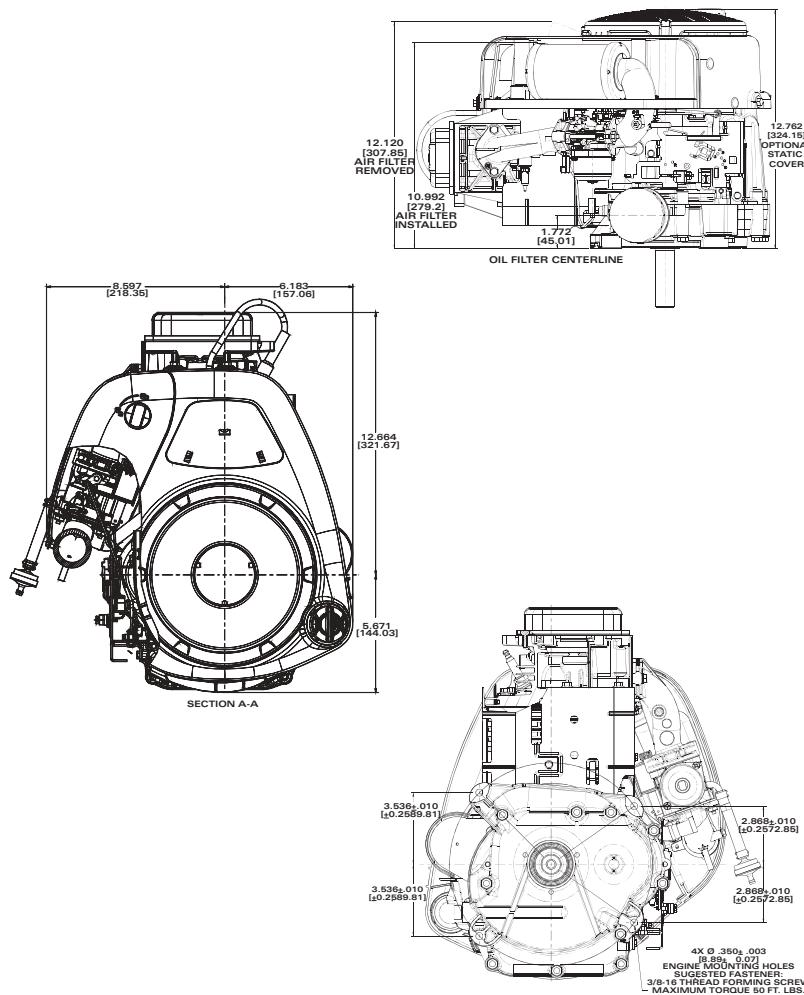

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Controls	Fuel Pump, Integral	Oil Pump with Filter	Choke-A-Matic	ReadyStart®	Ground Wire Terminal	Remote Stop	Fuel Tank (Quarts)	Top Governor Speed	Notes
<b>31R907</b>																
0006-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32	6:00	R		X	X	X	X			3300	5,14
0007-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32		R		X	X	X	X			3300	5,14
0022-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32		R	X	X	X	X	X			3300	5,14
<b>31R976</b>																
0016-G1	591763	1 in.	7/16-20	1/4-Str.	3-5/32	9:00	R	X	X	X	X	X			3600	1,14
<b>31R977</b>																
0027-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32		R	X	X	X	X	X			3300	5,14
0029-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32		R		X	X	X	X			3300	4,14
0032-G1	591762	1 in.	7/16-20	1/4-Str.	3-5/32		R	X	X	X	X	X			3600	5,14
0033-G1	591763	1 in.	7/16-20	1/4-Str.	3-5/32		R		X	X	X	X			3300	4,14

†All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

(1) Engine equipped with 9 AMP DC Battery-less Alternator

(4) Engine equipped with 12 volt Gear Drive Starter and Dual Circuit Alternator (3 AMP DC - 14 Volts AC)

(5) Engine equipped with 12 volt Gear Drive Starter and 9 Amp DC Alternator

(14) Supress Afterfire Solenoid

Engines in bold type have promotional pricing