

XR950 Professional Series™

208 CC

Bore 2.68 in. (68.07 mm)

Stroke 2.20 in. (55.88 mm)

Oil Capacity 20 fl. oz. (0.59 L)

FEATURES:

Dura-Bore™ cast iron cylinder sleeve for extended life



Float carburetor for consistent easy starting

Dual-Clean™ air cleaner pleated paper filter with a foam pre-cleaner ensures maximum protection for extended engine life

Overhead valve design (OHV) for cooler operation and longer valve life

Mechanical Governor

Buyer protection package provides two-year limited commercial engine warranty

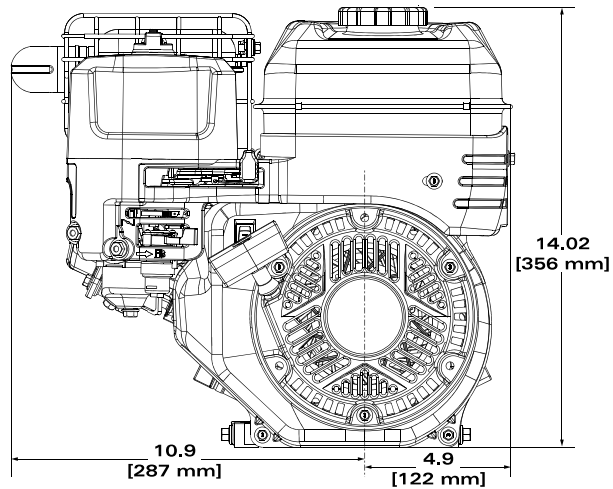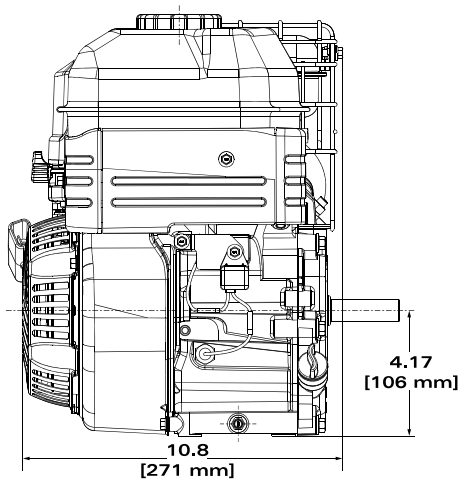

*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Controls	Manual Choke	Flange Mtg.	Accy Mtg. Boss	Stop Switch	Oil Sensor	Fuel Tank (Qt.)	Alternator	Governed Speed	Notes
130G32																
0022-F1	591520	3/4 in.	5/16-24	3/16-Sq	2-27/64	10:00	MF/R	Yes	Yes		Yes	Yes	3.2		3300	P
0056-F1	591520	3/4 in.	5/16-24	3/16-Sq	2-27/64	10:00	MF/R	Yes	Yes		Yes		3.2		3200	
0244-F1	592933	5/8 in.	Threaded	5/8-18	2-27/64	10:00	MF/R	Yes	Yes		Yes	Yes	3.2		3800	
130G52																
0182-F1	595439	3/4 in.	6:1 CCW	3/16-Sq		10:00	MF/R	Yes			Yes	Yes	3.2		3300	P
130G37																
0183-F1	591520	3/4 in.	5/16-24	3/16-Sq	2-27/64	10:00	MF/R	Yes	Yes			Yes	3.2	3A,DC	3600	1

(1) 12 Volt Gear Drive Starter