

# 9.50 GROSS TORQUE\*

## 223 CC

Bore 2.91 in. (73.91 mm)

Stroke 2.04 in. (51.80 mm)

Oil Capacity 18-20 fl.oz. (0.54-0.59 L)



### FEATURES:

ReadyStart® starting system with no prime, no choke, no worries, just pull for power


Dual-sealing air cleaner for improved debris resistance and longer life

Acoustically-engineered muffler for quiet operation and excellent tonal quality

Less vibration for more user comfort and enhanced engine life

Mechanical Governor

**Buyer protection package provides two-year limited consumer engine warranty\*\***

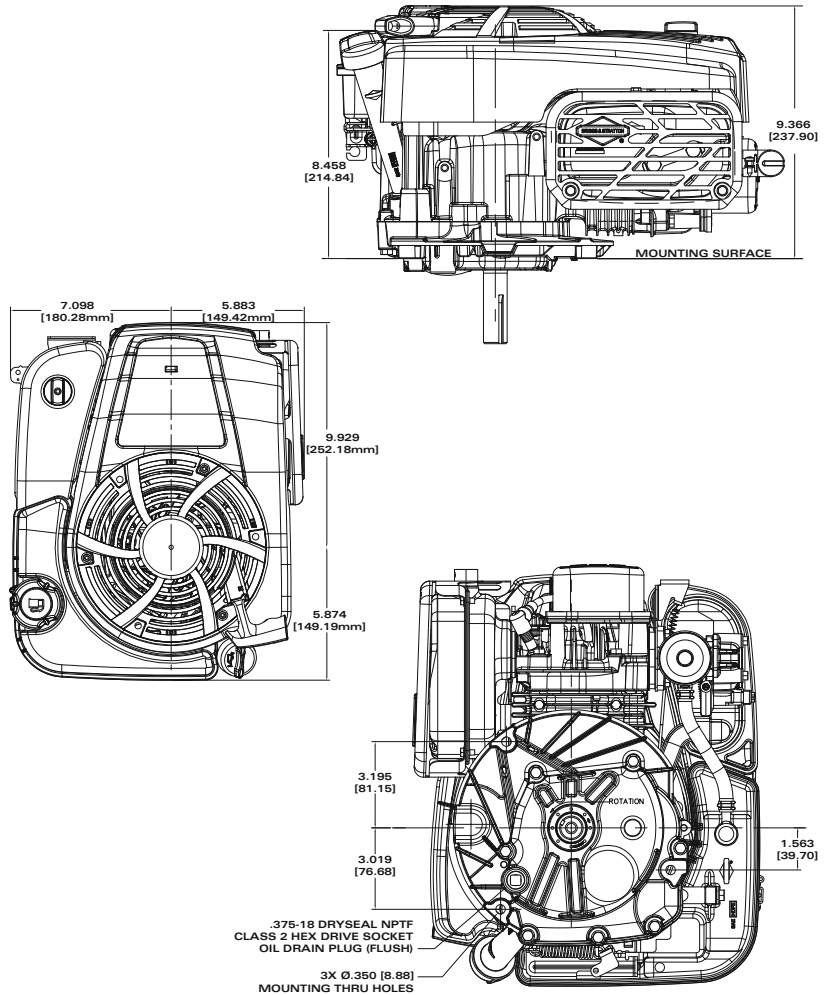

| MTT           | Crankshaft # | P.T.O. Diameter | Drilled & Tapped | Keyway             | Length  | Starter Position | Ext. Starter Rope | Heavy Flywheel | Controls | 5 Position Choke | Primer Carburetor | ReadyStart® | Oil Pump w/Filter | Fuel Tank (Quarts) | Top Governor Speed | CPSC Blade Break | Notes |
|---------------|--------------|-----------------|------------------|--------------------|---------|------------------|-------------------|----------------|----------|------------------|-------------------|-------------|-------------------|--------------------|--------------------|------------------|-------|
| <b>14B937</b> |              |                 |                  |                    |         |                  |                   |                |          |                  |                   |             |                   |                    |                    |                  |       |
| 0011-F1       | 799473       | 7/8 in.         | 3/8-24           | 1#505 WK 3/16-Str. | 1-13/16 | 5:30             |                   | X              | FC       |                  |                   | X           | 1.2               | 3100               |                    |                  | 3     |
| 0012-F1       | 591415       | 7/8 in.         | 3/8-24           | 2#505 WK 3/16-Str. | 3-5/32  | 5:30             |                   |                | R        |                  |                   | X           | 1.2               | 2800               | X                  |                  | 3     |

\*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

(3) Engine equipped with 12 volt Gear Drive Starter and .5 Amp DC Alternator