

# XR1150 Professional Series™

## 250 CC

Bore 2.97 in. (75.44 mm)

Stroke 2.20 in. (55.88 mm)

Oil Capacity 28 fl. oz. (0.83 L)

### FEATURES:

Kool Bore™ aluminum alloy bore for cooler operation



Float carburetor for consistent easy starting

Dual-Clean™ air cleaner pleated paper filter with a foam pre-cleaner ensures maximum protection for extended engine life

Overhead valve design (OHV) for cooler operation and longer valve life

Mechanical Governor

**Buyer protection package provides two-year limited commercial engine warranty**

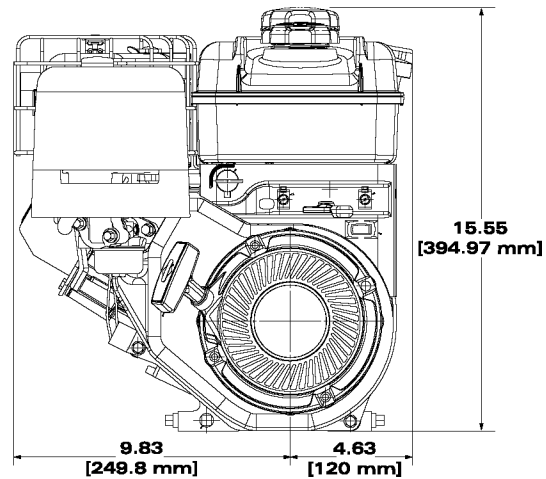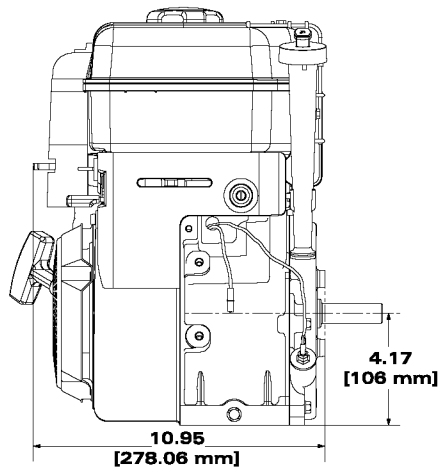

\*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Controls	Manual Choke	Flange Mtg.	Accy Mtg. Boss	Stop Switch	Oil Sensor	Fuel Tank (Qt.)	Alternator	Governed Speed	Notes
15T212																
0008-F8	797076	7/8 Taper	3/8-24	NA	2-23/32	10:30	MF	Yes	Yes				3.2		3600	
0160-F8	797075	1 in.	3/8-24	1/4-Sq	2-57/64	10:30	R/AG/MF	Yes	Yes				3.2		3800	P
0223-F8	797070	3/4 in.	5/16-24	3/16-Sq	2-7/16	10:30	R/AG/MF	Yes	Yes				3.2		3800	
15T232																
0036-F8	797072	3/4 in.	5/16-24	3/16-Sq	2-7/16	10:30	R/AG/MF	Yes	Yes		Yes	Yes	3.2		3600	
15T237																
0050-F8	797072	3/4 in.	5/16-24	3/16-Sq	2-7/16	10:30	R/AG/MF	Yes	Yes		Yes	Yes	3.2	1.5A,DC	3600	1
15T292																
0071-F8	797075	AUX. PTO 1 in.	2:1 - 3/8-24	1/4-Sq	2-57/64	10:30	R/AG/MF	Yes					3.2		3800	

(1) 12 Volt Gear Drive Starter