



Professional Series™ 25.0 Gross HP

724 CC

Bore 3.12 in. (79.20 mm)
 Stroke 2.89 in. (73.40 mm)
 Oil Capacity 64 fl. oz. (1.90 L)

FEATURES:

- Mechanical compression release
- Chrome plated exhaust valves reduce valve wear
- Premium high capacity air, oil and fuel filters
- Super-finished crank pin bearing
- Advanced Debris Management System with a dual seal, cartridge air filter
- Buyer protection package provides two-year limited consumer engine warranty**

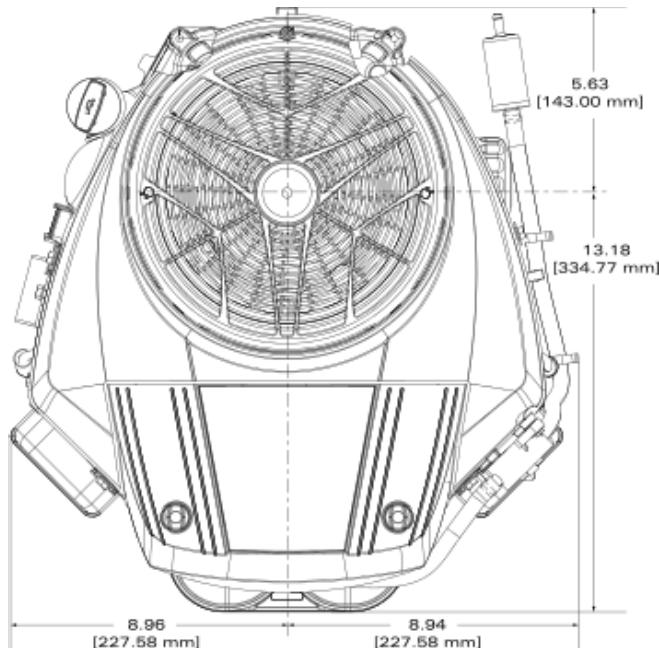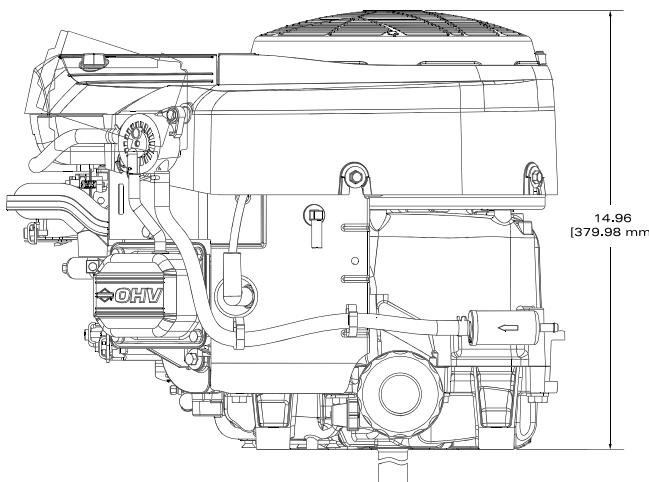

†All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Cyclonic Filter	Controls	Oil Cooler	Fuel Pump	Oil Pump / Filter	Choke-A-Matic	ReadyStart®	Remote Choke	EFM	Alternator	Governed Speed	Notes
44S977																		
0012-G1	796257	1 in.	7/16-20	1/4-Sq.	4-19/64	R		X	X	X					16A,DC	3300	1,7	
0013-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X				X		16A,DC	3300	1,7	
0014-G1	796256	1-1/8 in.	7/16-20	1/4-Sq.	4-19/64	R		X	X				X		16A,DC	3300	1,7	
0015-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X				X		16A,DC	3400	1,7	
0016-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X	X					16A,DC	3300	1,7	
0018-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X	X					9A,DC	3500	1,7	
0020-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X	X					9A,DC	3400	1,7,8	
0021-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X	X					3A,DC-60W,AC	3300	1,7	
0032-G1	796237	1 in.	7/16-20	1/4-Sq.	3-5/32	R		X	X		X				16A,DC	3400	1,7	
0033-G1	796256	1-1/8 in.	7/16-20	1/4-Sq.	4-19/64	R		X	X		X				16A,DC	3400	1,7	

(1) 12 Volt Gear Drive Starter

(7) Supress Afterfire Solenoid

(8) Static Cover Installed