
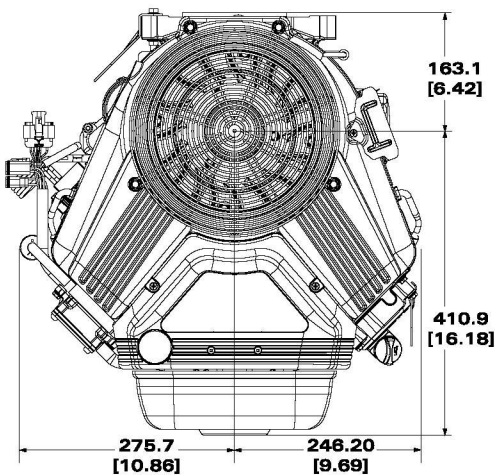


Vanguard® EFI
40.0 Gross HP†
993 CC

Bore 3.42 in. (86.87 mm)
Stroke 3.46 in. (87.88 mm)
Oil Capacity 82 fl. oz. (2.43 L)

- FEATURES:**
- Marine, weather resistant electrical connectors
 - Electronic Fuel Injection
 - Dura-Bore™ cast iron cylinder sleeve for extended life
 - Dura-Clean™ air cleaner pleated paper filter with a foam pre-cleaner ensures maximum protection for extended engine life
 - Full pressure lubrication with spin-on oil filter assures controlled lubrication for extended component life
 - Overhead valve design (OHV) for cooler operation and longer valve life
 - Buyer protection package provides three-year commercial limited warranty**

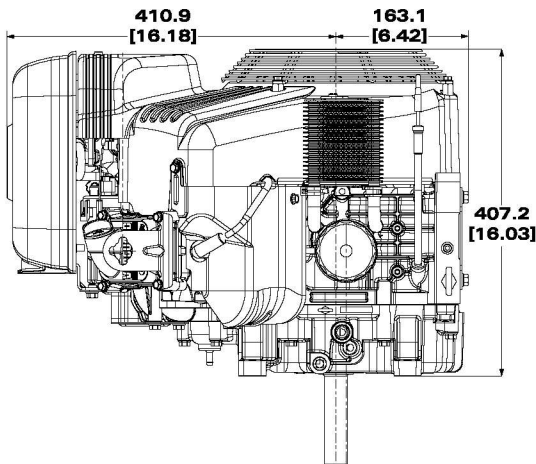

†All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton. For accessory options see the [Repowering Accessories M54-61 Vanguard™ Big Block Catalog](#) (To open PDF in new tab, press Control Key while clicking link).

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Cyclonic Filter	Controls	Oil Cooler	Fuel Pump	Oil Pump / Filter	Choke-A-Matic	ReadyStart®	Remote Choke	EFM	Marine	Alternator	Governed Speed	Notes
61G977																			
0004-J1	848064	1-1/8 in.	7/16-20	1/4-Sq.	4-1/2	No	R	Yes	Yes	Yes					Yes	20/50A,DC	4750	2,8	
(2) 12 Volt Solenoid Shift Starter				(8) Static Cover Installed															