

875 Professional Series™

190 CC

Bore 2.69 in (68.33 mm)

Stroke 2.04 in (51.82 mm)

Oil Capacity 20 fl. oz. (0.59 L)

FEATURES:

ReadyStart® starting system with no prime, no choke, no worries, just pull for power

Certified to CARB Tier III and meets 2012 EPA Phase 3 Standards



Large rewind starter reduces pulling effort for easy starting

Commercial grade air cleaner with dual seals for longer engine life

Overhead valve design (OHV) for cooler operation and longer valve life

Mechanical Governor

Buyer protection package provides two-year limited consumer engine warranty

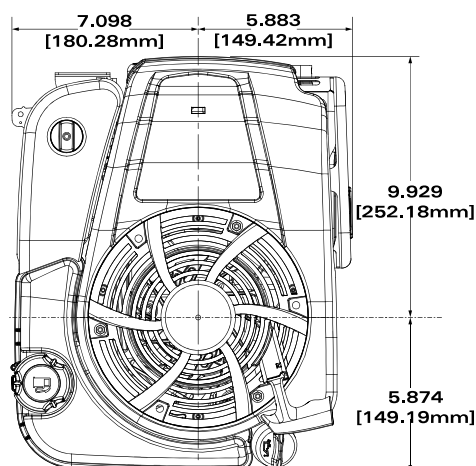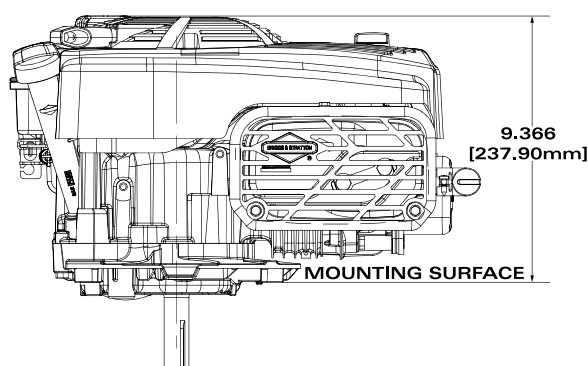

*All Power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Heavy Flywheel	Controls	5 Position Choke	Primer	ReadyStart®	Fuel Tank (Qt.)	Governed Speed	Alternator	CPSC Brake	Notes
125P02																
0002-F1	597441	7/8 in.	3/8-24	2 #505 WK, 3/16-Sq.	3-5/32	5:30	No	FC			Yes	1.06	3100		Yes	
0012-F1	597471	25 mm	3/8-24	2 #605 WK, 1/4-Sq.	3-5/32	5:30	No	FC			Yes	1.06	3100		Yes	P
0017-F1	597441	7/8 in.	3/8-24	2 #505 WK, 3/16-Sq.	3-5/32	5:30	Yes	FC			Yes	1.06	3600		No	
0003-F1	597471	25 mm	3/8-24	2 #605 WK, 1/4-Sq.	3-5/32	5:30	Yes	FC			Yes	1.06	3400		No	
125P05																
0010-F1	597471	25 mm	3/8-24	2 #605 WK, 1/4-Sq.	3-5/32	5:30	No	FC			Yes	1.06	3100		Yes	1
125P07																
0047-F1	597173	25 mm	7/16-20	3/16-Sq.	3-5/32	5:30	Yes	FC			Yes	1.06	3400	.5A,DC	No	1
0011-F1	597471	25 mm	3/8-24	2 #605 WK, 1/4-Sq.	3-5/32	5:30	Yes	FC			Yes	1.06	3400	.5A,DC	No	1
125P42																
0013-F1	597471	25 mm	3/8-24	2 #605 WK, 1/4-Sq.	3-5/32	5:30	No	FC			Yes	1.06	3100		Yes	

(1) 12 Volt Gear Drive Starter