

CXi2000 Series™

20.0 Gross HP[†]

656 CC

Bore 2.97 in. (75.44 mm)
 Stroke 2.89 in. (73.41 mm)
 Oil Capacity 64 fl. oz. (1.89 L)

FEATURES:



Patented 5-Step Debris Management System for extended durability under heavy debris conditions
 Cyclonic air filter provides ultimate debris protection and lasts 2X longer than panel-style air cleaner systems

Increased cylinder block structure for added strength and durability

Cooling fin inspection panels speed debris inspection and cleaning

Full pressure lubrication with spin-on oil filter assures controlled lubrication for extended component life

Buyer protection package provides three-year limited commercial engine warranty

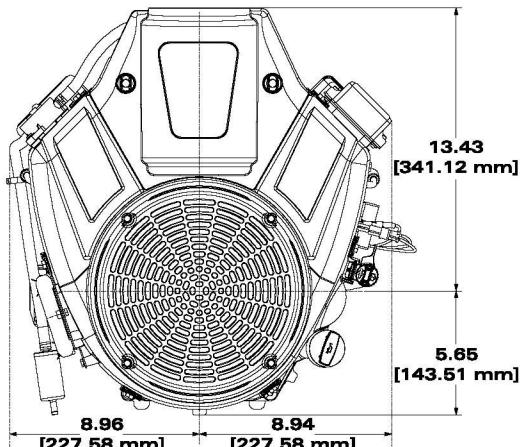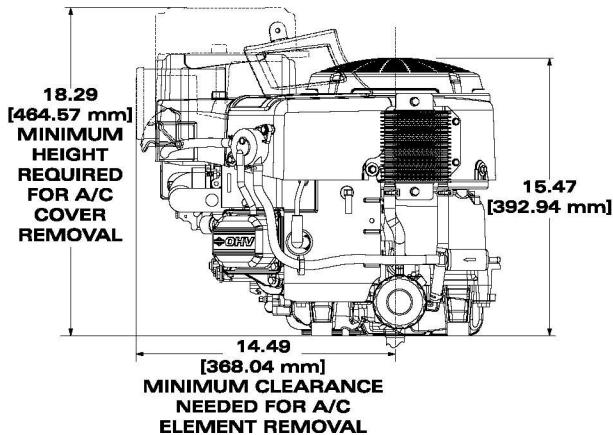

[†]All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton. For accessory options see the [Repowering Accessories M40-44-49 Catalog](#) (To open PDF in new tab, press Control Key while clicking link).

MTT	Crankshaft #	P.T.O. Diameter	Drilled & Tapped	Keyway	Length	Starter Position	Cyclonic Filter	Controls	Oil Cooler	Fuel Pump	Oil Pump / Filter	Choke-A-Matic	ReadyStart®	Remote Choke	EFM	Alternator	Governed Speed	Notes
40T877	0012-G1	796237	1 in.	7/16-20	1/4-Sq.	3-3/16	Yes	R	Yes	Yes	Yes	Yes	Yes	Yes	16A,DC	3600	1,7,P	

(1) 12 Volt Gear Drive Starter

(7) Suppress Afterfire Solenoid