





9.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH318SA, OHSK90
HORSEPOWER	9.0 6.71 kW
BORE & STROKE	3.125 x 2.532 in. 79.38 x 64.31 mm
DISPLACEMENT	19.43 cu. in. 318 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	60 lbs. 27.2 kg
BOLT MTG. CIRCLE	3.625 & 5 in. 90 mm & 130 mm

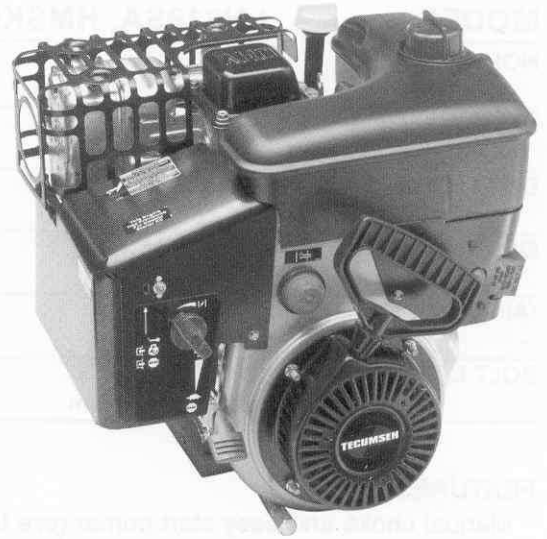

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered® to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life. (Enduro® XL only)
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

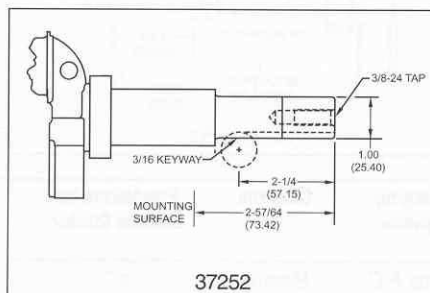

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
909302B	Standard	37252	18 Watt	Manual	X *	Dual Side	1 Gallon (3.8 ltrs.) Ref. 9	3600

* 33329E - 120 Volt electric starter can be installed.